

ADVANCE ADAPTERS INC.

P.O. Box 247, 4320 Aerotech Center Way

Paso Robles, CA 93447

Telephone: (800) 350-2223 Fax: (805) 238-4201

P/N: 712567

PAGE 1 OF 3

Page Rev. Date: 02-27-14

JEEP AX15 5SP TRANSMISSION TO CHEVY & BUICK ENGINES

KIT CONSISTS OF:

No.	Qty	Part No.	Description
1.	1	712567-BLK	FULL BELLHOUSING ADAPTER
2.	1	712567-PLT	DUST COVER
3.	1	716168	BUSHING (.750 ID for 1995 & newer)
4.	1	716170	PILOT BUSHING
5.	1	716179	CLUTCH RELEASE LEVER
6.	1	716180	CLUTCH FORK BALL PIVOT (Installed)
7.	1	716211	TRANSMISSION BEARING RETAINER ASSY.
8.	1	716215	SPECIAL METRIC FITTING
9.	1	716343	PUSH ROD FOR 716213 SLAVE CYLINDER
10.	1	716742	SEAL
11.	1	716635-A	SLAVE CYL. PUSH ROD END
12.	4	722542	#10 x 1/2" LONG SELF TAPPING SCREWS
13.	2	723704	3/8" LOCK WASHERS
14.	2	723719	3/8"-24 JAM NUT (FOR PUSH ROD)
15.	2	723725	H.H.C.S. 3/8"-16 x 2" (Slave Cylinder Mounting Bolts)
16.	6	723740	S.H.C.S. 3/8"-16 x 1-1/2" LG.
17.	1	JP001	JEEP INSTRUCTION MANUAL

OPTIONAL ITEMS:

CF360056	10-1/2" P.P.
N1430	Release Bearing
383271	10-1/2" Disc
716130-60	Slave hose
716213	Slave Cylinder
(Toyota P/N 31470-60022)	

Most 1997 & up GM 4.3L V6 engines had a larger crank I.D. The pilot bushing in this kit requires a steel sleeve, P/N 716155.

INSTALLATION INSTRUCTIONS:

This bellhousing is not compatible with transmissions that were previously equipped with diesel engines. The bellhousing design incorporates a special modified clutch release lever and a Toyota Land Cruiser slave cylinder. We have provided slave cylinder mounting on the passenger side of the bellhousing; and have incorporated a new push rod location on the release arm that will provide a quick short travel of the clutch release mechanism. The kit does not include the Toyota Land Cruiser slave cylinder, Part No. 31470-60022. The bellhousing is designed for the 153 tooth flywheel application. If your block is equipped with a 168 tooth flywheel, you will be required to use a high torque starter without a nose cone to fit the bellhousing (P/N 22-0001). The bellhousing is compatible with the Buick flywheel that has 160 teeth. A slight modification may be required in the starter pocket area when using the Buick installation.

The inside of the bellhousing uses a high profile Centerforce diaphragm clutch assembly. By using this pressure plate, you can be sure that the slave cylinder travel will be appropriate for obtaining a maximum clutch release. The release bearing, P/N N1430, is a standard flat faced Chevy release bearing. The bearing must not have continual contact with the fingers of the clutch. Adjust the length of your push rod for clearance between the fingers and the face of bearing.

In order to adjust the height of the release bearing, we recommend that you install the new bellhousing over the clutch assembly and onto the engine prior to assembling the transmission to the bellhousing. By doing this procedure, you will be able to install the clutch release lever, slave cylinder, slave cylinder push rod, and release bearing directly to the clutch assembly. The reason this is necessary is that there are variations as to the thickness of the flywheel which either raise or lower the fingers of the clutch as related to the release bearing. The push rod of the slave cylinder can be adjusted, to obtain the necessary clearance between the release bearing and clutch fingers. If the bearing is permitted continual contact on the fingers, then you will have premature release bearing failure.

SPECIAL NOTE: The components packaged in this kit have been assembled and machined for specific type of conversions. Modifications to any of the components will void any possible warranty or return privileges. If you do not fully understand modifications or changes that will be required to complete your conversion, we strongly recommend that you contact our sales department for more information. This instruction sheet is only to be used for the assembly of Advance Adapter components. We recommend that a service manual pertaining to your vehicle be obtained for specific torque values, wiring diagrams and other related equipment. These manuals are normally available at automotive dealerships and parts stores.

ADVANCE ADAPTERS INC.

P.O. Box 247, 4320 Aerotech Center Way

Paso Robles, CA 93447

Telephone: (800) 350-2223 Fax: (805) 238-4201

P/N: 712567

PAGE 2 OF 3

Page Rev. Date: 11-26-12

JEEP AX15 5SP TRANSMISSION TO CHEVY & BUICK ENGINES

We do not furnish a rubber boot for the area between the bellhousing and clutch arm since it is too restrictive for the clutch arm movement. We believe that the location of the opening is such that any dust or other debris will have a hard time accessing the opening. If you anticipate water hazards, we would recommend a small rubber flapper that could be screwed to the outside of the bellhousing.

INSTALLATION INSTRUCTIONS:

1. Install the pilot bushing into the engine crank. **Note:** This bushing is oil impregnated. **DO NOT USE ANY TYPE OF GREASE ON THIS PART.** (See illustration on Page 3 for depth of pilot bushing information).
2. Bolt the flywheel to the engine crank using special flywheel bolts.
3. Assemble the clutch assembly and special disc to the flywheel using special clutch bolts.
4. Assemble the clutch release arm to the inside ball pivot of the bellhousing.
5. Bolt the slave cylinder to the outside of the bellhousing.
6. Test fit the bellhousing assembly over the clutch assembly and onto the engine block.
7. Place the N1430 release bearing onto the clutch arm fork.
8. Adjust the length of the slave cylinder push rod to a length that provides a minimum of 1/8" clearance between the release bearing face and clutch fingers.
9. The test fit over the clutch assembly is primarily done to establish the push rod length. If this procedure is eliminated, you will not have any visual inspection for verifying the push rod adjustment.
10. Remove the bellhousing assembly from the engine.
11. In each kit, you will find a new transmission bearing retainer and seal that must be mounted in place of the original Jeep bearing retainer.
12. Bolt the bellhousing to the front of your Jeep 5 speed transmission using the original bolts. Make sure that the two dowel pins installed in the face of the 5 speed transmission are properly fitted to the AA bellhousing.
13. Slide the new release bearing onto the new AA bearing retainer. Make sure that there is grease in the internal cavity of the release bearing. Most new bearings are pre-lubricated.
14. With all the components in position, you can now bolt the new bellhousing assembly onto the engine block. We have provided six (6) new socket head bolts, 3/8"-16 x 1-1/2" long for this purpose. Make sure the engine dowel pins are properly aligned with the new bellhousing dowel pin holes. **DO NOT FORCE THE BELLHOUSING ONTO THE ENGINE BLOCK.** Some applications may require the tip of the input shaft to be modified slightly. The bellhousing must fit evenly to the engine block.
15. With the bellhousing now in position and the slave cylinder push rod installed, you should be able to verify the clearance between the release bearing and clutch fingers. The lever should have movement of approximately 1/8" to 1/4". **CAUTION:** If you have too much clearance, you will be utilizing too much of the slave cylinder stroke and could possibly prevent you from obtaining a full clutch release. A light duty return spring attached to the clutch release arm will prevent any premature contact of the release bearing with the clutch fingers.
16. The Toyota Land Cruiser slave cylinder will replace the original Jeep slave cylinder. In order to adapt the Jeep hydraulic line to the new slave cylinder, we have included a special fitting for this purpose. P/N 716130-60 is a new stainless steel hose that works great for the connection of the slave cylinder to the master cylinder.
17. With the new slave cylinder installed, you can now bleed the slave cylinder installation by pumping up the slave cylinder pedal. Most installations are compatible with the original Jeep master cylinder. We have encountered a few installations that require changing of the master cylinder to a smaller 3/4" piston. If you have any type of clutch difficulty related to full disengagement of the clutch assembly, contact Advance Adapters for any updated information.
18. Jeep used 3 different master cylinders with the YJ & TJ vehicles. Early models have a threaded connection while the late YJ use a spade prong type & the TJ use a prong type with an o-ring. You may need to order **P/N 716130** (for YJs) or **P/N 716130TJ** (for TJs).

DUST COVER INSTALLATION:

Prior to transmission assembly, we recommend test fitting and assembling of the dust cover onto the bellhousing. Two of the 4 holes have already been drilled for self tapping screws. The lower two holes will need to be drilled for 2 self tapping screws. The drill size should be 11/64 (.171 Diameter), approximately 1/2" deep. On some applications, the new hole may enter the slave cylinder mounting hole.

ADVANCE ADAPTERS INC.

P.O. Box 247, 4320 Aerotech Center Way

Paso Robles, CA 93447

Telephone: (800) 350-2223 Fax: (805) 238-4201


P/N: 712567

PAGE 3 OF 3

Page Rev. Date: 05-24-04

JEEP AX15 5SP TRANSMISSION TO CHEVY & BUICK ENGINES

NOTE: If using a Chevy V8 168 tooth flywheel, a Vortec V8 or Vortec V6 with a 168 tooth flywheel, you will be required to use a special starter. Along with the starter comes a slave cylinder spacer for the bellhousing to clear the new starter. You will also be required to exchange release arm P/N 716179 for P/N 716179V. This longer arm will compensate for the slave cylinder spacer.

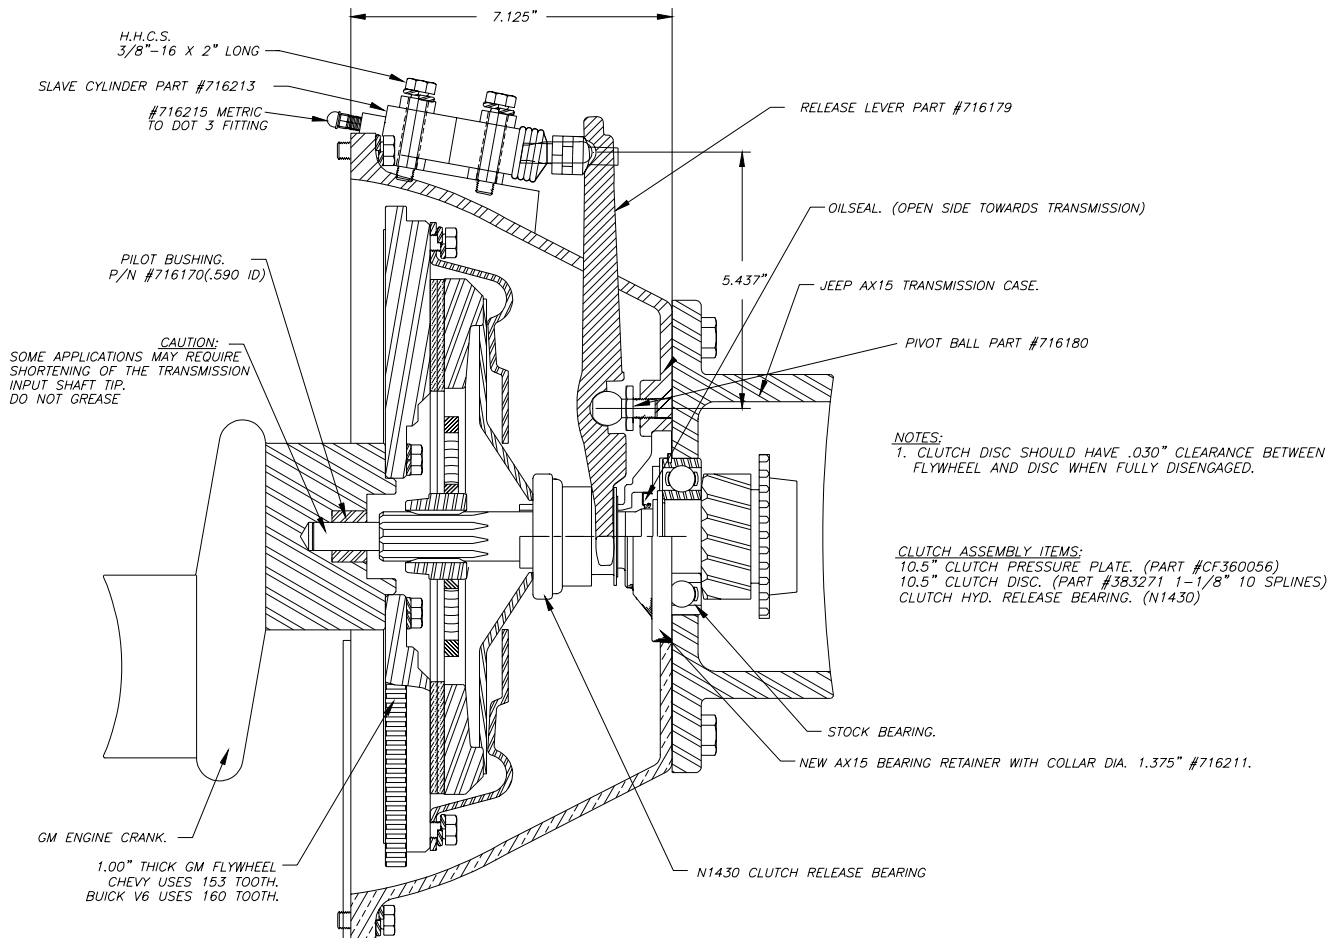

SPECIAL NOTE: The components packaged in this kit have been assembled and machined for specific type of conversions. Modifications to any of the components will void any possible warranty or return privileges. If you do not fully understand modifications or changes that will be required to complete your conversion, we strongly recommend that you contact our sales department for more information. This instruction sheet is only to be used for the assembly of Advance Adapter components. We recommend that a service manual pertaining to your vehicle be obtained for specific torque values, wiring diagrams and other related equipment. These manuals are normally available at automotive dealerships and parts stores.